
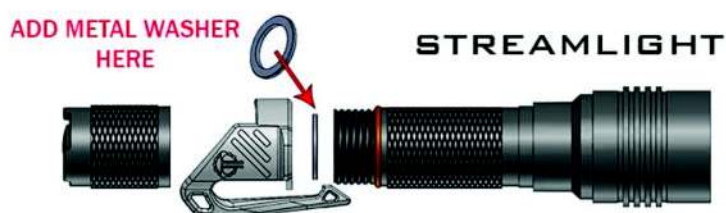


		COMPATIBLE	NOT COMPATIBLE
Low Profile Carry Clip	Surefire	6PX, 6PL, 6P	Older G2, G2L, G3L, A2, Dual Fuel FURY, DFT, LX2, E1B Maxvision, E2 Executive, Tactician, Tactician E2T-MV. Peacekeeper is not consistently compatible (needs to be tightened over time)
		G2X , G2X Pro	
		P2X or P3X (FURY & Intellibeam)	
		lights with tailcap part number: 12708-1	
	Modlite	All handheld models	None
	Streamlight	Protac HL-X	Protac 2L, 2LX, 1L, HL-USB, Polytac X, Strion, Strion LED HL, others have not been tested or require modification
	Elzetta	All models (but may impede rotary switch function; momentary works fine)	None
	Cloud Defensive	Upcoming handhelds are expected to fit	None
This chart will be updated as light testing is available			

Installation Diagram and Directions:

## ASSEMBLY

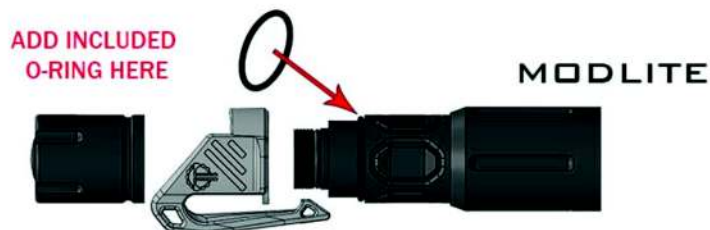

The LPC Clip installs similarly to the **Thyrm SwitchBack Flashlight Ring**. Leave o-ring(s) that come with your flashlight already, on the light. Unscrew the tailcap of the flashlight, then add the LPC Clip along with o-ring and/or aluminum washer before reattaching the tailcap. Note that different lights require different installation as shown in the diagram. For instance, SureFire lights with click tailcaps should need neither the o-ring nor the aluminum washer.