

MARATHON

//01

# Rubber Strap Specifications



Marathon  
Watch

December  
2021

## Marathon 3-Piece, Rubber Strap System

Individual pieces included:

*1x Tail Piece (120mm)*

*1x Medium Head Piece (70mm)*


*1x Long Head Piece (90mm)*

*1x Brushed Stainless Steel Clasp & Spring Bar*

*4x 20mm Shoulderless Spring Bars*

*4x 20mm Shouldered Spring Bars*

- Hand-made in La Chaux-de-Fonds, Switzerland
- Crafted from FKM-70-SH-A Rubber for the utmost strength, flexibility and comfort.
- Designed for premium thickness and pliability with no break-in period required.
- 2, 6 o'clock buckle straps, – medium and long-length, with 8 adjustment holes to ensure the perfect fit.

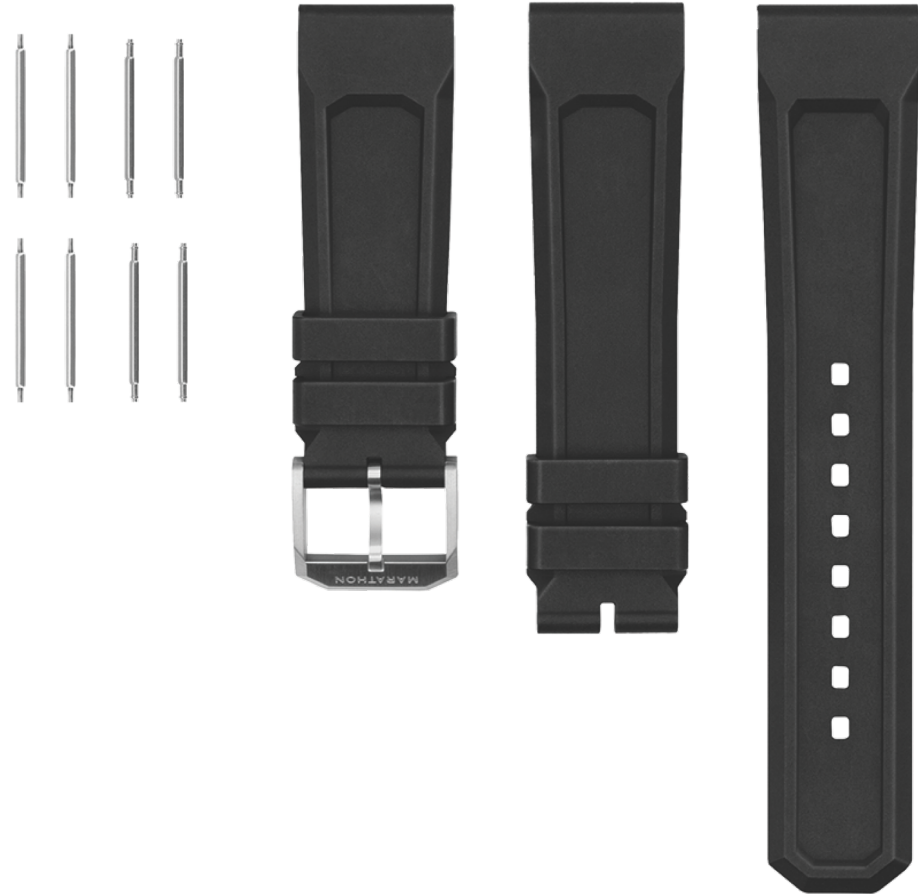

# Details

---

### Hardware

Marathon hardware is cut from 316L stainless steel with a beveled clasp and thick tongue for increased breaking strength.



### Strap Grip

Strap lining is etched with our Marathon Cog to provide comfortable grip in wet or greasy environments.



### Braking System

Built-in keeper guard to prevent keeper from slipping while mounting your strap on your wrist.



### **3 – Piece System**

Hand made in La Chaux-de-Fonds,  
Switzerland.




### **Fluoroelastomer Rubber**

Crafted from FKM-70-SH-A  
Rubber for the utmost  
strength, flexibility and comfort.




18 mm

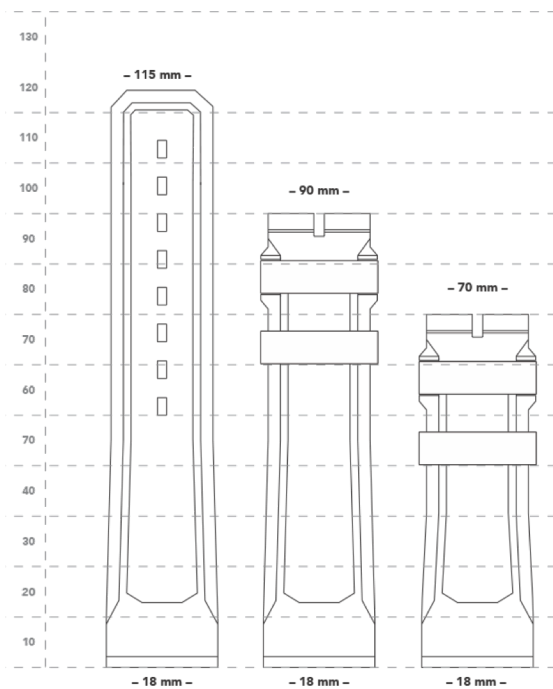


WS-RB-BKPS-18

20 mm

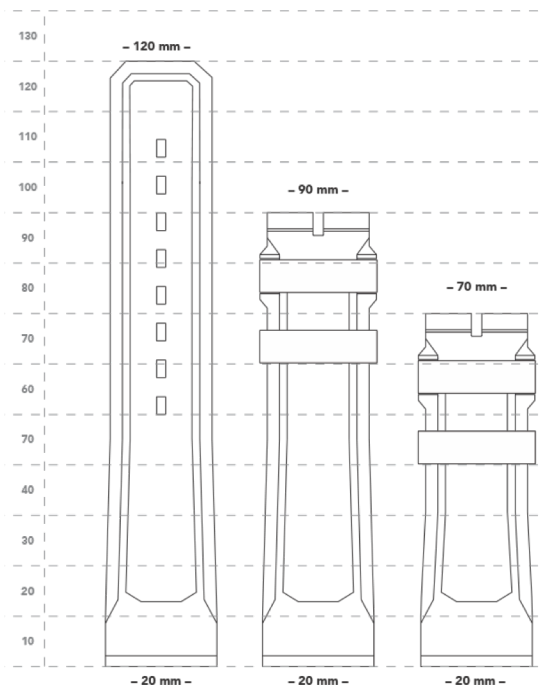

WS-RB-BKPS-20

22 mm

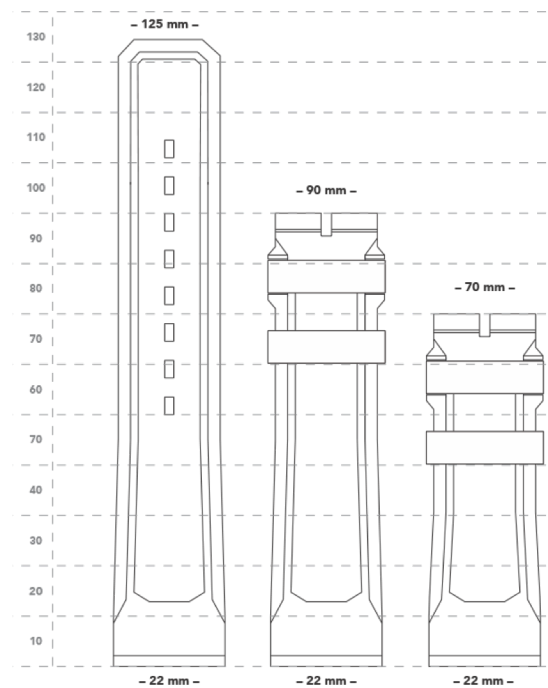

WS-RB-BKPS-22

# Specifications



MARATHON

//02

# Sizing & Adjusting



Marathon  
Watch

December  
2021

### **SIZING YOUR WRIST:**

To determine your wrist size, wrap a string or thread around your wrist at the point where you normally wear your watch. Mark the string where it crosses itself, lay it flat on a table and measure the distance between the marks.

### **SIZING SPECIFICATIONS:**

There are two lengths to your watch strap, the tail-end or “6 o’clock” (length of long section), and the buckle end or “12 o’clock” (length of short section, excluding buckle). When reading a watch strap sizing such as (120/70 mm), the first number (120) is the length of the tail end in millimeters. The second number (70) is the length of the buckle end.

#### **The 18 MM 12 O’CLOCK STRAP**

COMFORTABLY FITS WRIST SIZES:  
5.75 to 8.75 inches (150 to 220 mm)



#### **The 20 MM 12 O’CLOCK STRAP**

COMFORTABLY FITS WRIST SIZES:  
6.0 to 9 inches (155 to 230 mm)




#### **The 22 MM 12 O’CLOCK STRAP**

COMFORTABLY FITS WRIST SIZES:  
6.5 to 9.25 inches (165 to 240 mm)



# Sizing Specifications



## 1. REMOVING THE BUCKLE:

Your Marathon Rubber Strap has small holes on the side to make changing the buckle easier

Step 1: Insert the pin-pusher end of spring bar tool into one of the holes, compressing the spring bar until it releases from the buckle. Repeat for other side.

Step 2: Remove the spring bar completely by pulling it with your fingers. If the spring bar does not come easily, use the pin pusher end of the spring bar tool to push it out.


Once the spring bar has been removed, the buckle tongue will slide out easily.

## 2. INSTALLING THE BUCKLE:

Step 1: Insert the spring bar through one side of the strap until it reaches the cut-out.

Step 2: Insert the buckle tongue into the cut-out section and hold it in place while you push the spring bar through the rest of the way. Use the pin-pusher to help if needed.

Step 3: Catch one side of the buckle on the spring bar and then use the forked end of the spring bar tool to compress the spring bar on the other side and slide the buckle over the top of it. Give the buckle a gentle pull to make sure it is attached securely.

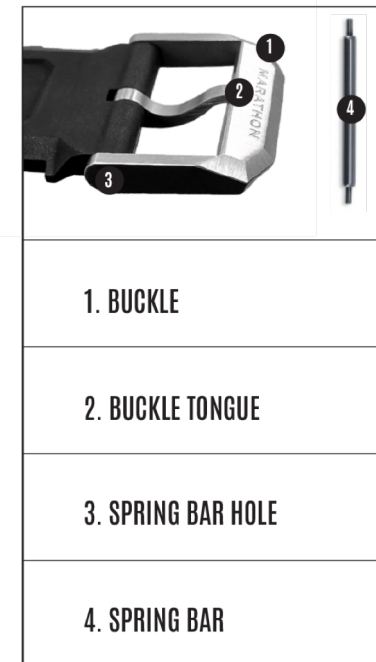

# Changing the Buckle



MARATHON

//04

## CONTACT

For additional information, please contact  
[infomarathonsrl@marathonwatch.com](mailto:infomarathonsrl@marathonwatch.com)



Marathon  
Watch

| December  
2021